


Exploded view of AROP-B 312NV & ARP-B 300NV

Updated 19.12.2018

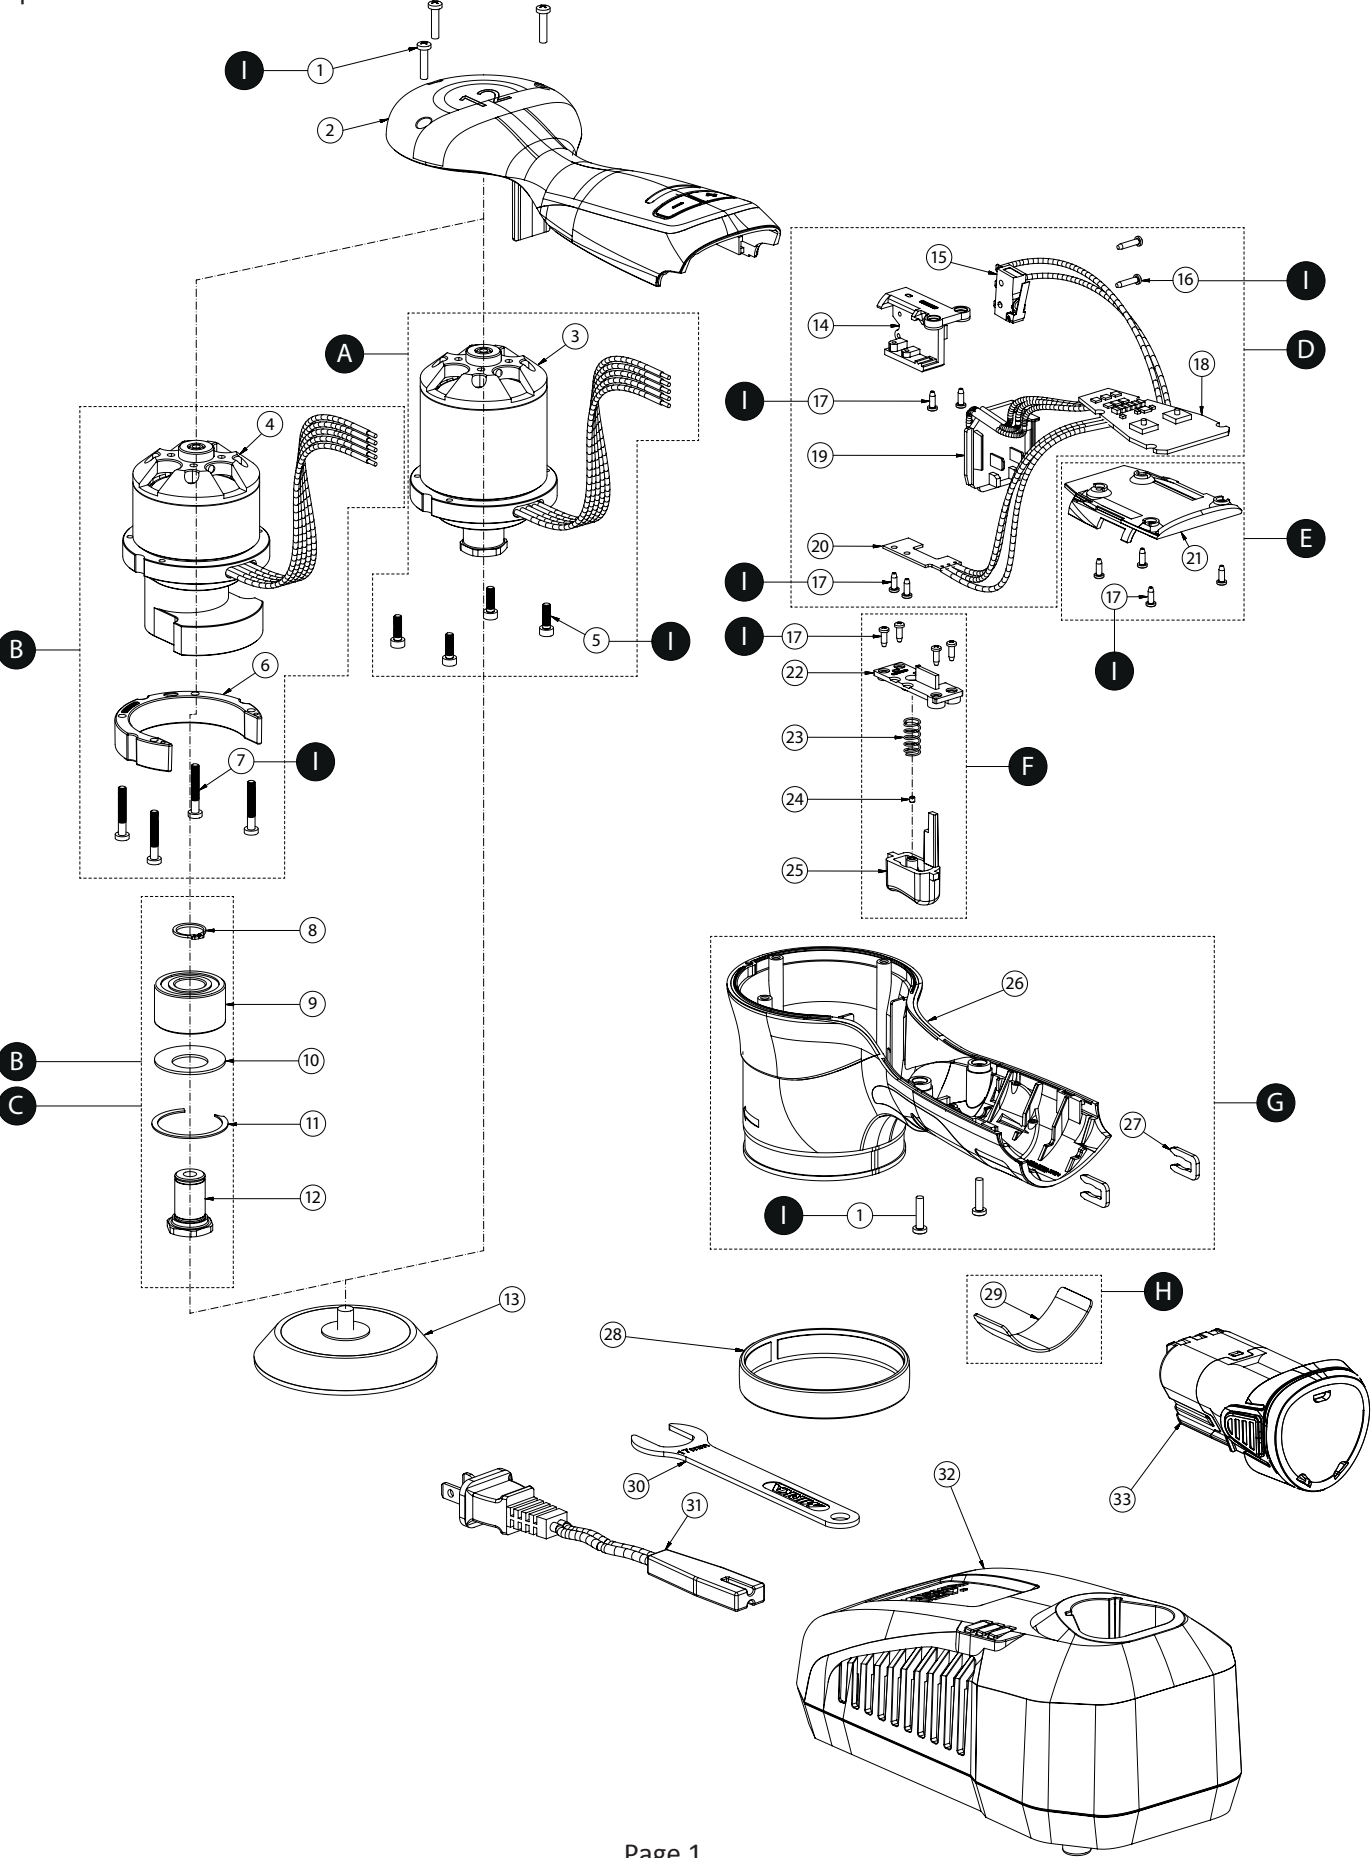

AROP-B & ARP-B Spare part kits

Electrical tool must be serviced by a qualified repair person and in accordance with national requirements.

Note! Repairs done by non-authorized repairer will breach the Mirka warranty

Mirka code	Item	Description	Kit	Qty	Tightening torque
8991020311	ARP-B Motor				
	3	ARP-B Motor 30g Pad	A	1	
	5	Screws for ARP-B Motor		4	0,6-0,8Nm
8991020411	AROP-B Motor orbit 12.0 mm				
	4	AROP-B Motor 30g Pad Orbit 12.0 mm		1	
	6	Base Block for Arop Motor		1	
	7	Screws for AROP-B Motor		4	0,6-0,8Nm
	8	Retaining ring	B	1	
	9	Bearing		1	
	10	Belleville Washer		1	
	11	Retaining ring		1	
	12	Spindle		1	
8991020811	Spindle Bearing kit for AROP-B				
	8	Retaining ring		1	
	9	Bearing	C	1	
	10	Belleville Washer		1	
	11	Retaining ring		1	
	12	Spindle		1	
8991021411	Speed Controller (Variable) kit				
	14	Holder		1	
	15	Switch		1	
	16	Assembly Screws for Switch	D	2	0,2-0,3Nm
	17	Assembly Screws		4	0,3-0,5Nm
	18	Speed Controller		1	
	19	Battery Terminal		1	
	20	Trigger Sensor PCB		1	
8991022111	PCB Cover kit				
	17	Assembly Screws	E	4	0,3-0,5Nm
	21	PCB Cover		1	

AROP-B & ARP-B Spare part kits

Mirka code	Item	Description	Kit	Qty	Tightening torque
8991022511		Trigger Button (Variable) kit			
	17	Assembly Screws		4	0,3-0,5Nm
	22	Trigger Button Cover	F	1	
	23	Trigger Spring		1	
	24	Magnet		1	
	25	Trigger Button		1	
8991022611		Housing kit			
	1	Assembly Screws	G	2	0,6-0,8Nm
	26	Housing		1	
	27	Assembly Clamps		2	
8991022911		Label kit (EU) for AROP-B & ARP-B			
	29	Type Label ARP-B	H	5	
	29	Type Label AROP-B		5	
		Label kit (North America) for AROP-B & ARP-B			
	29	Type Label ARP-B	H	5	
	29	Type Label AROP-B		5	
8991020111		Screw kit			
	1	Assembly Screws for housing	I	5	0,6-0,8Nm
	5	Screws for ARP-B Motor		4	0,6-0,8Nm
	7	Screws for AROP-B Motor		4	0,6-0,8Nm
	16	Assembly Screws for Switch		2	0,2-0,3Nm
	17	Assembly Screws		12	0,3-0,5Nm

Separate spareparts on next page.

AROP-B & ARP-B Spare parts

Mirka code	Item	Description	Kit	Qty	Tightening torque
	1	Assembly Screws for housing	G,I	5	0,6-0,8Nm
8991010211	2	Cover for ARP-B		1	
8991060211	2	Cover for AROP-B		1	
	3	ARP-B Motor 30g Pad	A	1	
	4	AROP-B Motor 30g Pad Orbit 12.0 mm	B	1	
	5	Screws for ARP-B Motor	A,I	4	0,6-0,8Nm
	6	Base Block for Arop Motor	B	1	
	7	Screws for AROP-B Motor	B,I	4	0,6-0,8Nm
	8	Retaining Ring	B,C	1	
	9	Bearing	B,C	1	
	10	Belleville Washer	B,C	1	
	11	Retaining Ring	B,C	1	
	12	Spindle	B,C	1	
8294791311	13	Backing Pad		1	
	14	Holder	D	1	
	15	Switch	D	1	
	16	Assembly Screws for Switch	D,I	2	0,2-0,3Nm
	17	Assembly Screws	D,E,F,I	12	0,3-0,5Nm
	18	Speed Controller	D	1	
	19	Battery Terminal	D	1	
	20	Trigger Sensor PCB	D	1	
	21	PCB Cover	E	1	
	22	Trigger Button Cover	F	1	
	23	Trigger Spring	F	1	
	24	Magnet	F	1	
	25	Trigger Button	F	1	
	26	Housing	G	1	
	27	Assembly Clamps	G	2	
8991012811	28	Soft Ring		1	
	29	Type Label ARP-B	H	1	
	29	Type Label AROP-B	H	1	
8993008013	30	Pad Wrench		1	
8991112211	31	Power Cord 2.0 m EU		1	
8991112311	31	Power Cord 2.0 m US		1	
8991112411	31	Power Cord 2.0 m UK		1	
8991112611	31	Power Cord 2.0 m CN		1	
8991112711	31	Power Cord 2.0 m ANZ		1	
8991123011	32	Battery Charger		1	
8991122211	33	Mirka Intelligent Battery BPA 10825 10.8V 2.5Ah		1	
8991122311	33	Mirka Intelligent Battery BPA 10850 10.8V 5.0Ah		1	